



# ALTERNATORS



**SPDT**

**BASIC MODEL:**

008-XXX-10

Small Case Version  
120VAC

Tall Case Versions  
24VAC, 220VAC




UL FILE #E101681

**FEATURES:**


- Solid State Circuitry
- Surge Protected
- Replaces Mechanical Types
- Plug In Base
- Economical, Easy to Install
- Lead/Lag/Auto Select Switch Option
- Push-To-Test Switch Option

**OPERATION**

The 008-XXX-10 series of alternators were designed for automatic duplex control of motors or other types of loads. They are available in a single phase voltage of 24, 120 or 220VAC. When power is applied to the alternator, the output relay contacts change state each time the control voltage is disconnected. Two options are available offering (1) a lead/lag/automatic selector switch and (2) a push-to-test switch for added convenience in testing or trouble shooting.

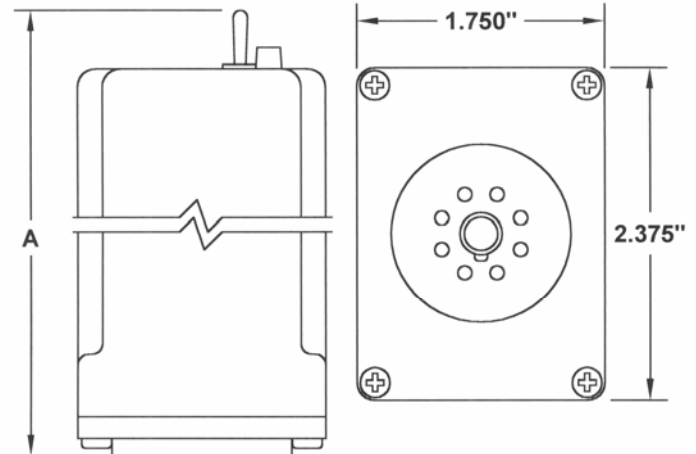

A = 3.35" - 120V Alternators  
A = 4.00" - 24V & 220V Alternators

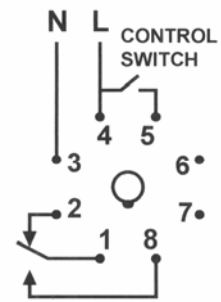

**SPECIFICATIONS**

Supply Voltage: 24, 120, 220 VAC - 1 Phase 50/60 Hz  
 Output Rating: 10A @ Operating Voltage  
 Relay Type: SPDT  
 Power Dissipation: Less Than 1 Watt  
 Operating Temp: -20 To +60 °C  
 Storage Temp: -45 To +85 °C  
 Enclosure: Lexan  
 Base: Phenolic

**ORDERING INFORMATION**

008 - XXX - 10 - XX  
 Product Type ————  
 Operating Voltage ————  
 (024, 120, 220)  
 Relay/Base Wiring ————  
 Options ————  
 S- Lead/Lag Switch  
 P- Push To Test  
 SP- Lead/Lag and PTT