



ALTERNATORS



DPDT

BASIC MODEL:

008-XXX-12

Small Case Version
120VAC

Tall Case Versions
24VAC, 220VAC




UL FILE #E101681

FEATURES:

- Solid State Circuitry
- Surge Protected
- Replaces Mechanical Types
- Plug In Base
- Economical, Easy to Install
- Lead/Lag/Auto Select Switch Option
- Push-To-Test Switch Option

OPERATION

The 008-XXX-12 series of alternators were designed for automatic duplex control of motors or other types of loads. They are available in a single phase voltage of 24, 120 or 220VAC. When power is applied to the alternator, the DPDT output relay contacts change state each time the control voltage is disconnected. Two options are available offering (1) a lead/lag/automatic selector switch and (2) a push-to-test switch for added convenience in testing or trouble shooting.

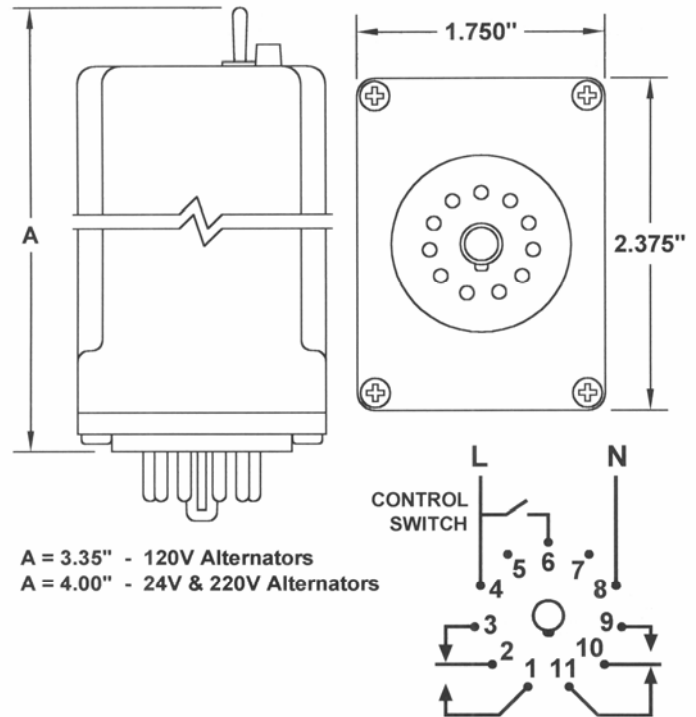

SPECIFICATIONS

Supply Voltage:	24, 120, 220 VAC - 1 Phase 50/60 Hz
Output Rating:	10A @ Operating Voltage
Relay Type:	DPDT
Power Dissipation:	Less Than 1 Watt
Operating Temp:	-20 To +60 °C
Storage Temp:	-45 To +85 °C
Enclosure:	Lexan
Base:	Phenolic

ORDERING INFORMATION

008 - XXX - 12 - XX	
Product Type	—
Operating Voltage (024, 120, 220)	—
Relay/Base Wiring	—
Options	—
	S- Lead/Lag Switch
	P- Push To Test
	SP- Lead/Lag and PTT